



RASCOflex AY223

ACRYLATE INJECTION MATERIAL

ACRYLATE INJECTION PRODUCTS

RASCOflex acrylates have been in use since successfully the mid-1960s. For RASCOR, environmental protection has always been a crucial concern. That is why RASCOR has always striven to use the most eco-friendly raw materials and production methods in manufacturing the RASCOflex acrylates. We make every effort to maximize eco-efficiency and not simply to meet the requirements specified in standards. No solvent-bearing products are used or needed either for the products or for the manufacturing process or for cleaning the injection equipment.

RASCOflex products are subject to strict, regular internal quality controls and are also continuously inspected by external laboratories.

USE

RASCOflex AY223 is a high-quality, swelling acrylate, summarizing the latest chemical technologies. Though suitable for many waterproofing applications, it is primarily used for injecting RASCOtec injection channels, RASCOtec injection hoses or other injection hoses, remedial crack and construction joints. The excellent swelling properties and solid material structure make RASCOflex AY223 suitable for large openings, including expansion joints.

RASCOflex AY223 is a versatile injection material. Neither high hydrostatic pressures nor temporary dry periods reduce the quality or service life.

The modular system with its various additives allows the site team to tailor RASCOflex AY223 at any time to the demands of the particular situation. It can thus be adjusted so as to produce a very heavily swelling grout body, to strengthen adhesion or to reduce shrinkage. RASCOR's technical consulting team will be glad to assist you in making the best choice.

FEATURES

- suitable for damp or wet environment
- can be used for wide, damp to heavily water-bearing cracks, construction joints and butt joints
- compact materialbody
- very elastic properties
- high swelling capacity
- reactive and reversible swelling action
- sealing achieved by swelling pressure on contact with water
- no adhesion required to joint/crack faces (injection possible even in case of partial soiling)
- free from PFAS, PFOS and PFOA

APPROVALS

- REACH-assessed exposure scenarios: water contact, periodic inhalation, application
- REACH-tested raw materials, classed as harmless

LEGAL NOTICE: The information provided on the use and application of our products in this technical data sheet is based on the present state of our knowledge. The customer shall bear sole responsibility for the proper specification, application and use of the products in line with the intended purpose, project-specific conditions and external actions. The most recent technical data sheet shall apply. The current technical data sheets are available at www.rascor.com. Our General Terms of Business shall form an integral part of this technical data sheet.



Further product info



EN C 13.01.2026

1 | 4

RASCOR International Ltd.

Gewerbestrasse 4
CH-8162 Steinmaur / Switzerland
Phone: +41 (0)44 857 11 11
www.rascor.com
info@rascor.com

RASCOR Construction Chemicals GmbH

Wallstrasse 16
DE-40878 Ratingen / Germany
Phone: +49 (0)2102 3076 521
www.rascor.com
germany@rascor.com



RASCOflex AY223

ACRYLATE INJECTION MATERIAL

TECHNICAL/PHYSICAL DATA

	A-Comp Base component	A-Cat Activator	B-P Hardener powder
Supplied form	liquid	liquid	powder
Material colour	purple	transparent	white
Container type	canister (plastic)	bottle (plastic)	pot (plastic)
Lid colour	black	black	black
Standard container size*	19.0 ltr / 22.4 kg	1.0 ltr / 1.13 kg	400 g
Density (DIN EN ISO 2811)	1.18 kg/ltr (± 0.03)	1.12 kg/ltr (± 0.03)	
Hazardous goods/ADR	none	none	UN 1444

*Filling is controlled by weight balance. Volume details are indicative only and vary with temperature fluctuations.

Mix (ready-to-use, incl. water component)

Apparent viscosity at 23°C (DIN EN ISO 2555)	10 - 25 mPas
Compressive strength (DIN EN 12190)	n/a
Swelling capacity	approx. 40 %
Start of polymerization at 20°C	approx. 70 - 110 s
Application temperature	from +5 °C to +60 °C
Storage/shelf life	12 months in original container at +5 °C to +25 °C, in dry conditions

Water is a component of the mix (for exact details of dosage, see section "Application/preparation")

The technical details are based on laboratory values from external and/or internal laboratory tests. These details are for information purposes only. The exact product values and their tolerances (e.g. temperature fluctuations ± 2 °C) are verified and approved on the basis of the test guidelines.

EXPERT REPORTS

- Impact on groundwater hygiene, MFPA Leipzig, Germany
- Model environmental product declaration available

SUPPLY/ADDITIVES

Item no.	Product	Container	Contents
1401.2221.001	RASCOflex AY223 40 ltr	set	40 ltr
1101.2221.001	RASCOflex AY223 A-Comp	canister	19 ltr
1101.2222.001	RASCOflex AY223 A-Cat	bottle	1 ltr
1101.2226.001	RASCOflex AY223 B-Powder	pot	400 g

Further delivery sizes available on request

1101.3022.001	RASCOflex AY-AC Accelerator	canister	10 ltr
1101.3011.001	RASCOflex AY-RE Retarder	canister	5 ltr
1101.3030.001	RASCOflex AY-DT A-Comp Rinsing Fluid	canister	10 ltr
1101.3031.001	RASCOflex AY-DT B-Comp Rinsing Fluid	canister	10 ltr
1101.3041.001	RASCOflex AY-PE Elastomer	canister	25 ltr
1101.3052.001	RASCOflex AY-QV100 Swell Enhancer	canister	20 ltr

Grouting machines, equipment and accessories available on request

LEGAL NOTICE: The information provided on the use and application of our products in this technical data sheet is based on the present state of our knowledge. The customer shall bear sole responsibility for the proper specification, application and use of the products in line with the intended purpose, project-specific conditions and external actions. The most recent technical data sheet shall apply. The current technical data sheets are available at www.rascor.com. Our General Terms of Business shall form an integral part of this technical data sheet.

RASCOR International Ltd.
CH-8162 Steinmaur / Switzerland
Phone: +41 (0)44 857 11 11

RASCOR Construction Chemicals GmbH
DE-40878 Ratingen / Germany
Phone: +49 (0)2102 3076 521



RASCOflex AY223

ACRYLATE INJECTION MATERIAL

APPLICATION/PREPARATION

RASCOflex AY223 is supplied in exactly proportioned quantities such that one container of each product is used for the mix. Partial quantities should be avoided. The material is injected using a 2-component injection pump with the components fed in the ratio 1:1 by volume (e.g. grouting machines: RASCOpump model HJP 14). Pumps used for acrylates must be made from stainless steel!

The **A-component is prepared** by mixing the catalyst A with the concentrate A-Comp. A mixing paddle must be used for mixing. The ready-mixed A-component may be kept for approx. 3 to 4 days, depending on the surrounding temperature.

The **B-component is prepared** by mixing the powder B-P with water to produce a total quantity of 20 ltr (do not use the A-component mixing paddle to mix the B-component!) The ready-mixed B-component may be kept for 2 to 5 days, depending on the surrounding temperature and water quality.

The prepared A- and B-components are mixed together later in the mixing head during the pumping operation. A static mixer is not required.

RASCOR offers a wide range of packer solutions, including screw packers, lamella packers, nail packers and one-day packers, made from different material types, with various diameters and lengths, and different coupling systems.

MODIFICATION / ADJUSTMENT OF PRODUCT PROPERTIES

Additives can be used at any time, also directly on site, to tailor RASCOflex AY223 to the demands of the particular situation.

Gel time acceleration: RASCOflex AY-AC

Reaction time delay: RASCOflex AY-RE

Polymer reinforcement: RASCOflex AY-PE

Source amplification: RASCOflex AY-QV100

To ensure correct dosage of the specific additive, please consult the relevant technical data sheet!

GENERAL GUIDELINES / SAFETY NOTICE

The use of different containers and mixing implements for the A- and B-components is essential. RASCOflex AY-RE Retarder and RASCOflex AY-AC Accelerator may only be added to the A-component. The use of RASCOflex AY-DT is recommended for cleaning the grouting equipment. No additional rinsing pump is needed for this.

Suitable protective clothing, gloves and goggles shall be worn. An eyewash bottle shall be kept at hand. For further details, please consult the safety data sheet.

CLEANING OF WORKING EQUIPMENT

During the period of application, the working equipment (pump, mixer unit, packers etc.) can be simply cleaned with water. Cured material can be removed mechanically, e.g. with a wire brush.

DISPOSAL

For details on how to dispose of the individual components, please consult the product safety data sheet. Cured material, in moderate quantities, may be disposed of with normal domestic waste.



LEGAL NOTICE: The information provided on the use and application of our products in this technical data sheet is based on the present state of our knowledge. The customer shall bear sole responsibility for the proper specification, application and use of the products in line with the intended purpose, project-specific conditions and external actions. The most recent technical data sheet shall apply. The current technical data sheets are available at www.rascor.com. Our General Terms of Business shall form an integral part of this technical data sheet.

RASCOR International Ltd.
CH-8162 Steinmaur / Switzerland
Phone: +41 (0)44 857 11 11

RASCOR Construction Chemicals GmbH
DE-40878 Ratingen / Germany
Phone: +49 (0)2102 3076 521




RASCOflex AY223

ACRYLATE INJECTION MATERIAL

GEL TIME

Gel time in minutes, in function of material/building fabric temperature

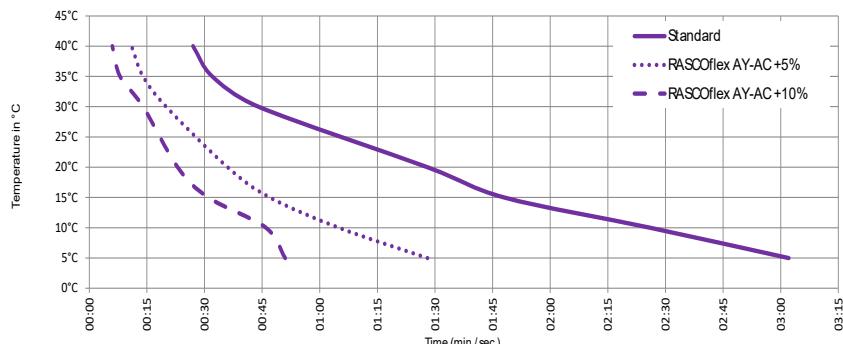


Guide values from laboratory tests!

Temp.	Standard	AY-AC +5%	AY-AC +10%
40 °C	00:27	00:11	00:06
35 °C	00:32	00:14	00:08
30 °C	00:44	00:20	00:14
20 °C	01:28	00:36	00:23
15 °C	01:48	00:47	00:31
10 °C	02:26	01:05	00:46
5 °C	03:02	01:28	00:51

Times specified in (min:sec)

RETARDATION TIME

Gel time in minutes, in function of material/building fabric temperature

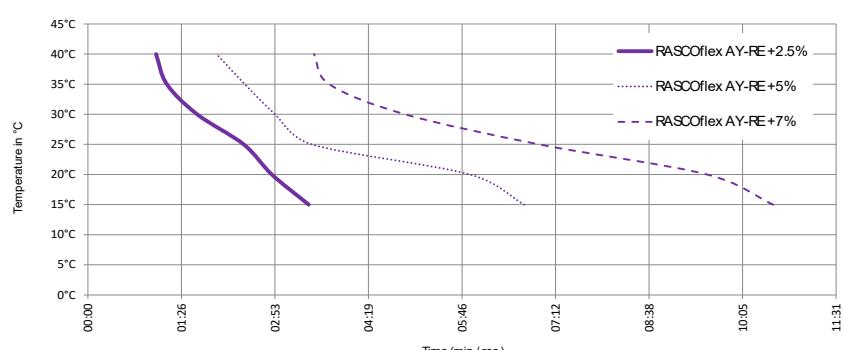

Guide values from laboratory tests!

Temp.	AY-RE +2.5%	AY-RE +5%	AY-RE +7%
40 °C	01:03	01:59	03:29
35 °C	01:13	02:25	03:43
30 °C	01:41	02:53	04:53
25 °C	02:24	03:27	06:57
20 °C	02:50	05:53	09:32
15 °C	03:24	06:43	10:33

Times specified in (min:sec)

NOTE: Any further increase, beyond the stated values, in the quantities added is not recommended and may impair waterproofing performance.

LEGAL NOTICE: The information provided on the use and application of our products in this technical data sheet is based on the present state of our knowledge. The customer shall bear sole responsibility for the proper specification, application and use of the products in line with the intended purpose, project-specific conditions and external actions. The most recent technical data sheet shall apply. The current technical data sheets are available at www.rascor.com. Our General Terms of Business shall form an integral part of this technical data sheet.

RASCOR International Ltd.
CH-8162 Steinmaur / Switzerland
Phone: +41 (0)44 857 11 11

RASCOR Construction Chemicals GmbH
DE-40878 Ratingen / Germany
Phone: +49 (0)2102 3076 521